



S'PRINT S

[illegible]

 "sixload". black mark.



????????????

- 58
-


???????, ?????????? ? ??????? ?????? ????????:

- 2 CEE 7/16
- NEMA 1-15
- 3 G BS1363
- 2 AS3112 (1 1)

?????????? ????????

????? ??????	XXXXXXXXXX
XXXXXXXXXX XXXXX	8 dots / X
XXXXXXXXXX XXXXXXXX X XXXXX	24 (XXXXXX40/42 X XXXXXXXX)
XXXXXXXXXX	203dpi
XXXXXXXXXX XXXXXXX (X / X)	50 (X XXXXXXXXXX X XXXXXXXXXX XXXXXXX, XXXXXXXXXX XXXXXXX X XXXXXXXXXX XXXXXXXXXX XXXXXXX XXXXXXX)
XXXXXXXX XXXXXXXX	ASCII XXXXXXXX, XXXXXXXXXX
XXXXX XXXXXXXX	XXXXXXXXXX, XXXXXXX XXXXXXX / XXXXXXX, XXXXXXXXXX, XXXXXXXXXX, XXXXXXX
XXXXXXXXXXXX XXXXXXX	XXXXXX, XXXXXXXXXX
XXXXXX XXXXXXX	58 X
XXXXXX XXXXXXX	60X
XXXXXX XXXXXXX	57.5 X± 1X
XXXXXXXXXX	CUSTOM
XXXXXXXXXXXX	XXXXXXXX 9 XXXXXXXXXX, RS232
XXXXX XXXXXXX	128 Byte
XXXX-XXXXXX	32 KB
XXXXXXXXXXXX XXXXXXX	1 XXXXXXX 384 x 85 dots
XXXXXXXX	Windows® (32/64 XXX) – XXXXXXX X XXXXXXXXXX WHQL X XXXXXXXXXX XXXXXXXXXX
XXXXXXXX	9 - 48 VDC / 11VA
CXXXXXXXX XXXXXXXXXX	1200 - 230 mA
XXXXXXXX XXXXX XXXXXXXXXX XXXXXXX	260.000 XXXXXXX (XXXXXXXXXXXX XXXXXXX)
XXXXXXXX XXXXXXXXXX	0°C + 50°C
XXXXXXXXXXXX	CE
XXXXXXXXXX	(LxPxA) 146x88x65X
XX	0,370 X (XXXX XXXXXXXXXX XXXXXXX)

??????

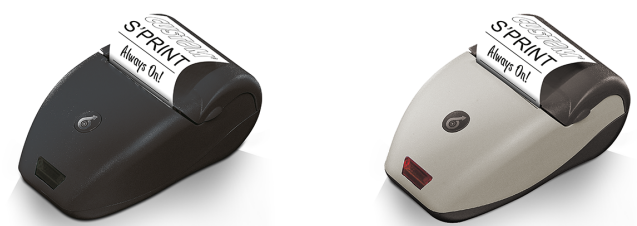

- 911DE010100133**

PRINTER S'PRINT RS232 24 COL
BLACK
- 911DE010500112**

PRINTER S'PRINT RS232 40 COL
BICOLOR