




PLUS4

4"

PLUS4 4" - 112 80 82.5 PLUS4 4MB



??

- 104
- linerless Maxstick B
- 4MB
- : PDF417 QR
- : GB18030
- LED
- FEED
- ECO :
- :RS232/TTL (), USB
- : , , ()
- UL, CE, FCC, CCC
- 5-8Vdc
- AV05



" " Maxstick B


??

-

????

- RS232/TTL USB, 5-8Vdc
- ()

??

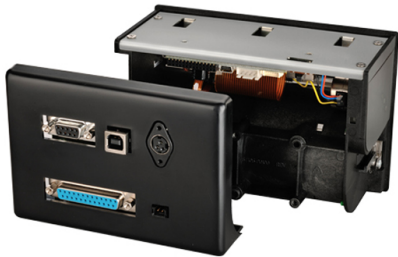

- RS232 DB9 USB 25 9-40VDC

?????????


-
-

????

????

	8 dots/mm		
	46 (11cpi) 59 (15cpi) 83 (20cpi)		
	203 dpi		
/	50,	70 mm/sec	
	(GB18030)		
	PDF417 QR		
	112 (114)	80	82.5
	50-60 g/m ²		
	104mm		
	50mm	12mm	
	Escape Command , PlusII		
	RS232/TTL, miniUSB,		
	2kB		
	4MB		
	1MB	+4MB	128KB + 8MB RAM
	Windows® 32/64 — WHQL		
	Linux 32/64		
	COM Linux Windows 32/64		
	™		
	iOS		
	PrinterSet, CustomPowerTool, Status Monitor, Custom Windows API		
	5-8 Vdc		
MTBF	180.000	()	
	50	/ 100 MI	
	-10 a +60		
	UL, CE, FCC, CCC		
	149(L) x 97,8(H) x 71,7(W)	89,1(W)	
	390	(510)	

??



915GJ010100322
PRINTER PLUS4 USB RS232 TTL

Via I. Newton, 4 - 43010 Fontevivo PR - IT02498250345 - +39 0521 680111 - 8RQN7AZ
18 2026